




3 DEAD BOLTS AND ADJUSTABLE LATCH BOLT

SHORT FACEPLATE

Latch bolt interchangeable with roller bolt cod. 01435

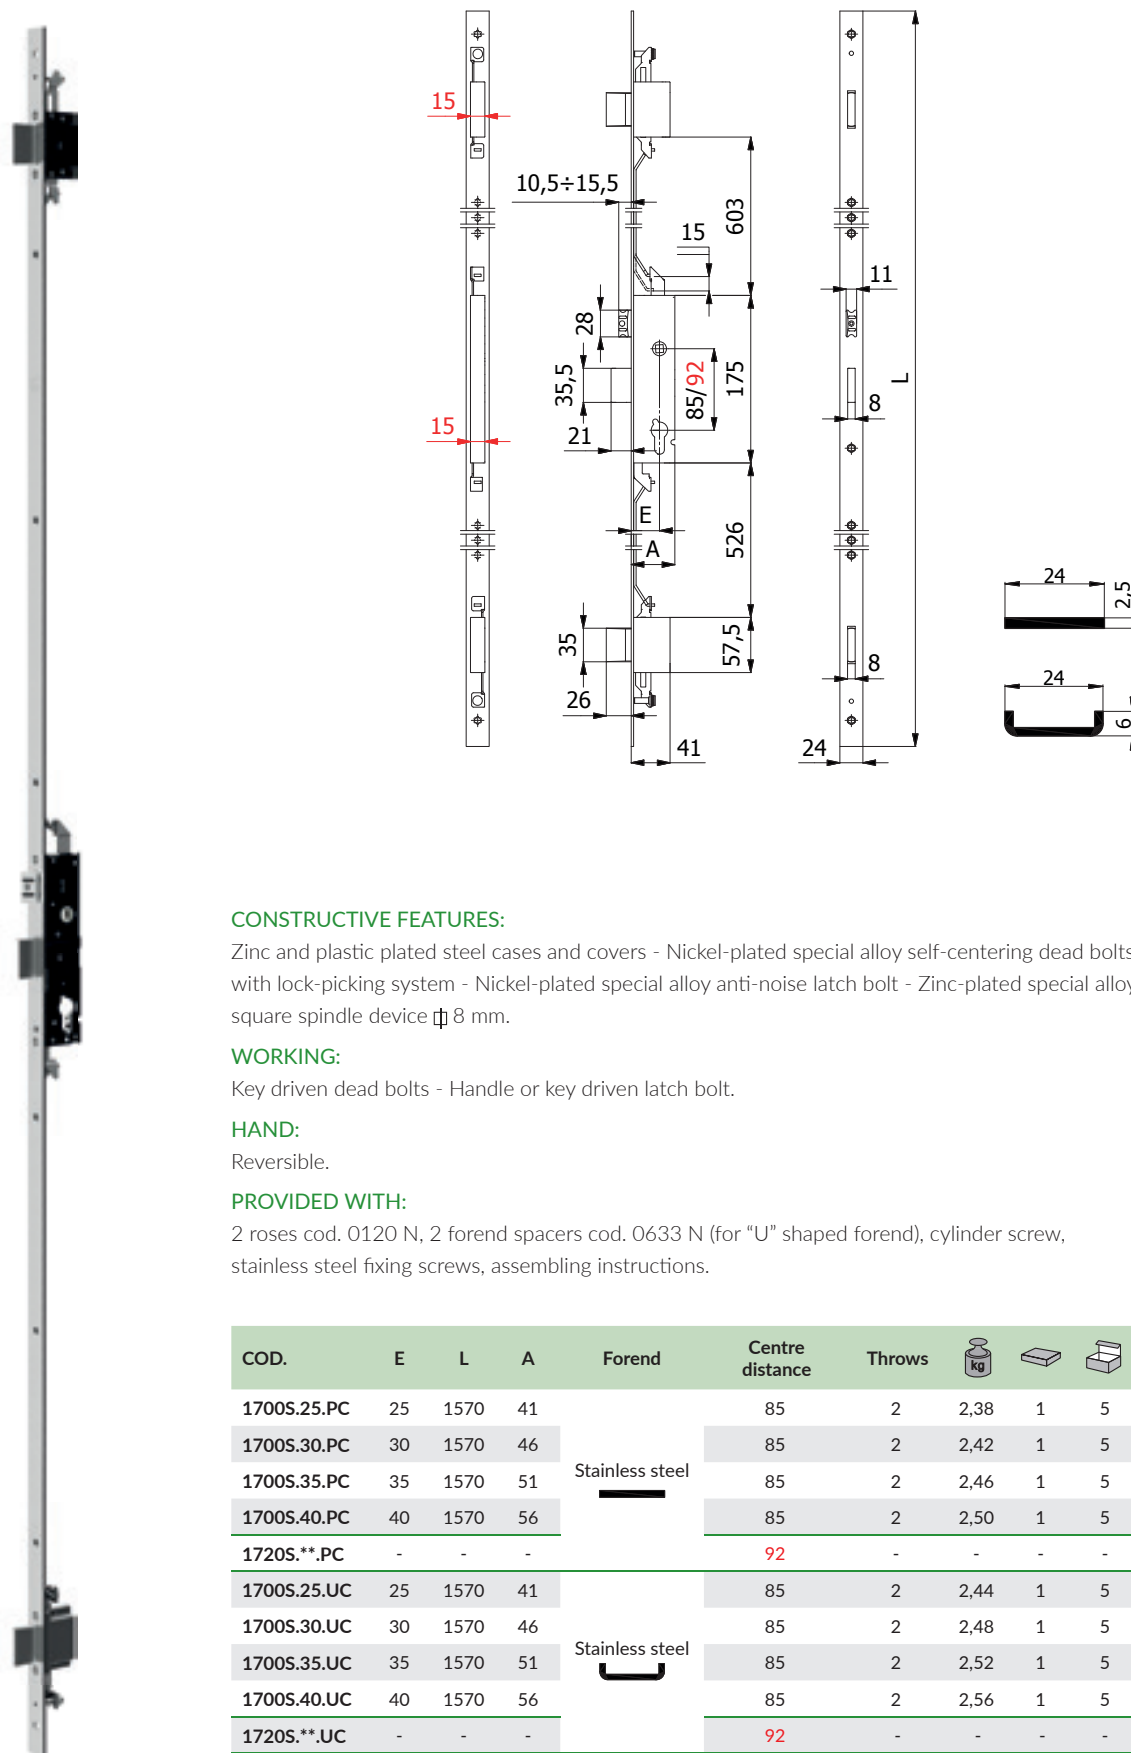

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel cases and covers - Nickel-plated special alloy self-centering dead bolts with lock-picking system - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device \varnothing 8 mm.

WORKING:

Key driven dead bolts - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

2 roses cod. 0120 N, 2 forend spacers cod. 0633 N (for "U" shaped forend), cylinder screw, stainless steel fixing screws, assembling instructions.

COD.	E	L	A	Forend	Centre distance	Throws	kg		
1700S.25.PC	25	1570	41	Stainless steel 	85	2	2,38	1	5
1700S.30.PC	30	1570	46		85	2	2,42	1	5
1700S.35.PC	35	1570	51		85	2	2,46	1	5
1700S.40.PC	40	1570	56		85	2	2,50	1	5
1720S.**.PC	-	-	-		92	-	-	-	-
1700S.25.UC	25	1570	41	Stainless steel 	85	2	2,44	1	5
1700S.30.UC	30	1570	46		85	2	2,48	1	5
1700S.35.UC	35	1570	51		85	2	2,52	1	5
1700S.40.UC	40	1570	56		85	2	2,56	1	5
1720S.**.UC	-	-	-		92	-	-	-	-